


DIN25400

14 Place Settings
Top control screen

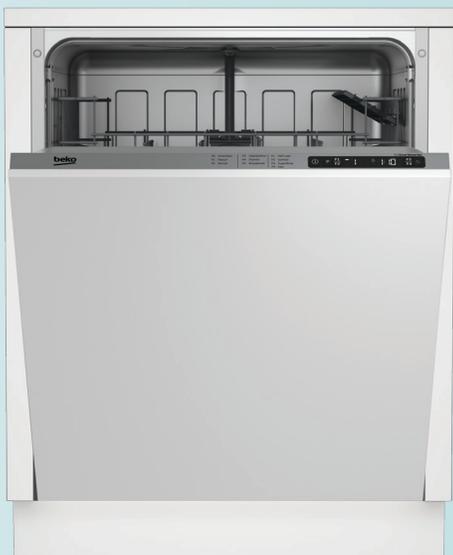

Main Features

- 5 programs
- 3 wash temperatures
- Prosmart Inverter Motor
- Condensing drying system
- 48 dBA wash noise level
- Program follow-up display
- Time delay up to 1-24 hrs.
- Auto tablet detergent function
- 1/2 Load function
- Sanitize function
- SuperRinse function
- Fast function
- 3 way euro filtering system
- Front adjustable rear feet
- Front adjustable hinge system
- Interior highloop with air gap
- Power plug

Interior Design

- All stainless steel tank
- Three spray arms (lower, upper and ceiling)

Premium Rack Loading System

- 2 adjustable mug shelves
- Sliding cutlery basket

Color

- DDN25400X: Stainless steel
- DIN25400: Fully Integrated



FEATURES



14 Place Settings

Beko dishwashers can perfectly clean dishes upto 14 place settings without leaving any piece of cutlery out.



Fast Function

The dishwasher increases the washing temperature and adjust the water pressure to provide up to 2 times faster cleaning performance.



SuperRinse

Additional rinsing function for households who desire an extra rinsing cycle with more water.



Auto Tablet

Sensors detects rinse aid and automatically sets drying cycle duration. This provides the best drying results without any concern.



Prosmart Inverter Motor

Variable speed circulation motor allows to use optimum necessary amount of water and energy. Due to magnetic design the motor has no persistent low frequency sound, and creates less vibration.

Double Motion Float System

All Beko dishwashers have a double motion float system (DMFS) that provides maximum security against water damage and a bottom tray to prevent flooding.

DIN25400

14 Place Settings Top control screen

CONTROLS

| | |
|--------------|------------|
| Control Type | Electronic |
| Position | Top |

MAIN FEATURES

| | |
|-----------------------------------|-----------------|
| Loading Capacity (place settings) | 14 |
| Tub material | Stainless Steel |
| Inner door material | Stainless Steel |
| Water Softener | - |
| DMFS overflow protection | ✓ |
| 5 level wash with 3rd spray arm | ✓ |
| Delay timer up to 1-24 hrs | ✓ |
| 3 way euro filter | ✓ |
| Drying | Condensation |
| Turbidity sensor | ✓ |
| Silence level, dBA | 48 dBA |
| InnerClean | ✓ |
| Auto Tablet function | ✓ |
| 1/2 Load function | ✓ |
| Sanitize function | ✓ |
| SuperRinse function | ✓ |
| Extra Drying | - |
| Fast function | ✓ |
| Interior high loop with airgap | ✓ |
| Power Plug | ✓ |

PROGRAMS

| | |
|---------------------------------|---|
| Number of programs | 5 |
| Heavy plus (167°F rinse temp) | ✓ |
| Normal (142°F-145°F rinse temp) | ✓ |
| Clean&Shine | ✓ |
| Delicate (149°F rinse temp) | - |
| Express (131°F rinse temp) | ✓ |
| Rinse & Hold | ✓ |

DISPLAY

| | |
|-----------------------------|------------|
| Program sequence | ✓ / Screen |
| Rinse aid indicator | Electronic |
| Rinse aid indicator display | ✓ |
| Salt indicator display | - |
| Light Indicator on Floor | ✓ |

RACK SYSTEM

| | |
|---------------------------------------|----------|
| Easy fold lower rack folding tines | - |
| Lower rack embossed stainless handle | - |
| Cutlery basket | Sliding |
| Upper rack (inset shelves) | 2 |
| Easy fold upper rack folding tines | - |
| Acrobat System, adjustable upper rack | Unloaded |
| Nylon coated racks | ✓ |

DIMENSIONS

| | | |
|------------------|---------|-----------------------|
| Packed (HxWxD) | in | 34 3/8x25 3/16x26 |
| | cm | 85.9x64.4x66.1 |
| Packed Weight | (lb/kg) | 96/43 |
| Unpacked (HxWxD) | in | 32 1/5x23 9/16x22 2/5 |
| | cm | 82x59.8x57 |
| Unpacked Weight | (lb/kg) | 89/40 |

ENVIRONMENTAL STANDARDS

| | |
|------------------------------|-----------|
| Energy Star qualified | ✓ |
| Energy consumption, kWh/year | 255 |
| Water consumption, gal/cycle | 3.5 - 5.0 |
| RoHS* compliant | ✓ |

* Lead-free

