

30 INCH SLIDE-IN ELECTRIC RANGE

SLER30420SS



Cooktop

4 electric cooking zones 12"XL cooking zone Residual heat indicator

Range

Convection cooking
Self-clean oven
XL interior volume 5.7 cu. ft.
Prime turkey cooking
Cool door
InnovaChef Smart Display
Interior Halogen lighting
Full extension storage drawer
Full extension telescopic rack
Bread proofing
Pizza
Sabbath Mode
3 Wire heavy duty racks
Adjustable feet

Accessories

Side trim kit optional Island trim included Splash back (9" high) optional

Dimensions

 $H \times W \times D$: 37 1/2"x 29 13/16" x 28 5/8" Height includes 1 1/2" for back guard Depth includes knobs & handle

Type Size Color Stainless Steel Side Walls Control type HUNCTIONS Multi-dimensional Cooking Convection Cooking Bottom Heater Convection Broiler Broiler Broiler Convection for Yes Broil Convection for Yes Continuation for Yes Convection for Yes Cool Door -4 Pane Heat Resistant Glass (fixed) Very Broiler Pan No No Work adapter No Cool Door -4 Pane Heat Resistant Glass (fixed) Very Cool Door Cool	GENERAL	SLER30420SS
Size Color Stainless Steel Black Control type FUNCTIONS Wilt-dimensional Cooking Convection Cooking Storiness Steel Side Walls Control type FUNCTIONS Wilt-dimensional Cooking Yes Convection Cooking Yes Broiler Yes Broiler Yes Broiler Yes Convection to roat True European convection Special FEATURES 12/24-hour clock format Splash Back Optional Island Trim Standard Simmering No Cooling Fan Cavity Enameling Color Oven Lights Aljustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type Tuel Type Tuel European Convection Storing No Cooling System Cool Glass Window Door Cooling System Net Capacity cu. ft. Soltom Heating Element Wattage Upper Heating El		
Color Side Walls Side Walls Side Walls Side Walls Side Walls Black Control type LED Display FUNCTIONS Wulti-dimensional Cooking Convection Cooking Bottom Heater Convection Cooking Convection Ower Yes Broiler Pyes Broil Electric Convection troiler Convection troiler Convection troiler Convection oast True European convection Special, Factures 12/24-hour clock format Splash Back Splash Splash Splash Back Splash Splash Splash Back Splash Splash Splash Back Splash Splash Splash Back Splash Back Splash Splash Splash Back	* '	
Side Walls Control type FUNCTIONS Multi-dimensional Cooking Convection Cooking Bottom Heater Convection Fooking Broiler Fire European convection Special, FEATURES 12/24-hour clock format Splash Back Optional Island Trim Slandard Slimmering Cooling Fan Cavity Enameling Colo Coven Lights Adjustable Feet Anti-tip (tilting) bracket Bottom Cooling System Net Capacity cu. ft. Sour Gooling Fool Cooling Fool Cool Cool Cooling Fool Cool Cool Cool Cool Cool Cool Cool		
Control type FUNCTIONS With different since in Cooking Convection Cooking Bottom Heater Convection		
Multi-dimensional Cooking		
Multi-dimensional Cooking Convection Cooking Bottom Heater Convection Froil Ferror Froil Froil Froil For Heater Convection Convection Froil Froi		LED DISPIAY
Convection Cooking Yes Bottom Heater Yes Convection Yes Broiler Yes Broil Electric Convection broiler Yes Convection broiler Yes Convection roast Yes True European convection No SPECIAL FEATURES Yes 12/24-hour clock format Yes Splash Back Optional Island Trim Standard Simmering No Cooling Fan Yes Cavity Enameling Color Black Oven Lights 2 x Halogen Adjustable Feet Yes Anti-tip (tilting) bracket Yes Bottom Compartment Storage Drawer Fuel Type Electric OVEN DOOR(S) "O" Shaped Metal + Glass Over Glass Window "O" Shaped Metal + Glass Door Cooling System Cool Door - 4 Pane Heat Resistant Glass (fixed) Net Capacity cu. ft. 5.7 cu. ft. Bottom Heating Element Wattage 3500W		Ves
Bottom Heater	_	
Convection Broiler	-	
Broiler		·
Broil Electric		
Convection broiler Convection roast Convection roast True European convection SPECIAL FEATURES 12/24-hour clock format Splash Back Splash Back Sland Trim Standard Simmering No Cooling Fan Cavity Enameling Color Oven Lights Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type OVEN DOOR(S) Oven Class Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Upwer Heating Element Wattag		
Convection roast True European convection Special FeATURES 12/24-hour clock format Splash Back Splash Back Splash Back Cooling Fan Cavity Enameling Color Oven Lights Adjustable Feet Anti-tip (tilting) bracket Sour Gooling System Coololing System Subcooling System Over Cooling System Over Cooling System Over Cooling System Over Cooling System Cooling System Cool Door - 4 Pane Heat Resistant Glass (fixed) Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Watta		
True European convection SPECIAL FEATURES 12/24-hour clock format Splash Back Island Trim Standard Simmering No Cooling Fan Govity Enameling Color Oven Lights Adjustable Feet Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type Goven Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating El		
SPECIAL FEATURES 12/24-hour clock format Yes Splash Back Optional Island Trim Standard Simmering No Cooling Fan Yes Cavity Enameling Color Black Oytional Simmering No Cooling Fan Yes Cavity Enameling Color Black Oyen Lights 2x Halogen Adjustable Feet Yes Anti-tip (tilting) bracket Yes Storage Drawer Electric OVEN DOOR(S) OVEN Class Window Ove		
12/24-hour clock format Splash Back Standard Simmering No Cooling Fan Cavity Enameling Color Oven Lights Adjustable Feet Arti-tip (tilting) bracket Sotrage Drawer Electric OverNDOOR(S) Oven Glass Window Over Glass Window Over Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Upogrill (Broil) Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Sabbath Mode Front Red Front Red Front Right Rear Left Front Right Splash		INO INO
Splash Back Island Trim Standard Simmering No Cooling Fan Yes Cavity Enameling Color Black Oven Lights 2 x Halogen Adjustable Feet Yes Anti-tip (tilting) bracket Yes Bottom Compartment Storage Drawer Fuel Type Electric OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity Cu. ft. S.7		V
Island Trim Simmering Cooling Fan Cavity Enameling Color Slack Oven Lights Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type OVEN DOOR(S) Oven Class Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Watt		
Simmering Cooling Fan Cavity Enameling Color Oven Lights Adjustable Feet Arti-tip (tilting) bracket Bottom Compartment Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) Grill (Broil) Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Pyrolytic Self Cleaning Sabbath Mode Wok adapter Chromed racks Coorfiguration Front Left Rear Left Front Right Rear Right Dimensions Power Artings Will (Broil) Grill (Broil) Groverall dim - height Overall dim - height Overall dim - depth Net Weight (b./kg) Power Artings Will Arting at 240V, 60Hz Supply Cord & Plug Cable No	•	· ·
Cooling Fan Cavity Enameling Color Oven Lights Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type Storage Drawer Fuel Type Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Low Grill (Broil) Grill (Broil) Accessories / Oven Calasi Pyrolytic Self Cleaning Sabbath Mode Broiler Pan No Wok adapter Chromed racks CookTOP Zone Configuration Front Left Front Right Rear Right Dimensions/WeliGHT Required cutout dim (H x W x D) (in) Overall dim - height Oven Idass Window "O" Shaped Metal + Glass Cool Door -4 Pane Heat Resistant Glass(fixed) "O" Shaped Metal + Glass Cool Door -4 Pane Heat Resistant Glass (fixed) "O" Shaped Metal + Glass Cool Door -4 Pane Heat Resistant Glass (fixed) "O" Shaped Metal + Glass Cool Door -4 Pane Heat Resistant Glass (fixed) "Ou Stoy Well (Broil) 2000W ACCESSORIES / OVEN CAVITY Stay in self clean - 6 levels No No No Ves Stay in self clean - 6 levels No No Ves Sabbath Mode Yes Broiler Pan No No No Wok adapter No Overall dim - Shaped Metal + Glass Overall dim - Height Overall dim - Height Overall dim - Height Overall dim - Height Overall dim - Width Overall dim - Height Overall dim - depth Net weight (b./kg) 258 lbs. /117 kilograms POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable No		
Cavity Enameling Color Oven Lights Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type Bottom Compartment Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - height Overall dim - width Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 50Hz Stay in self clean Stay in self clean - 6 levels Telescopic Pan No No No No Overall dim - height Overall dim - height Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 50Hz Supply Cord & Plug Cable No INSTRUCTIONS FOR USE Use & Care Manual Black 2 x Halogen Yes Stay Halogen Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Toron's Shaped Metal + Glass Toron's Shaped Meta	-	***
Oven Lights 2 x Halogen Adjustable Feet Yes Anti-tip (tilting) bracket Yes Bottom Compartment Storage Drawer Fuel Type Electric OVEN DOOR(S) "O" Shaped Metal + Glass Over Glass Window Cool Door -4 Pane Heat Resistant Glass(fixed) Net Capacity cu. ft. 5.7 cu. ft. Bottom Heating Element Wattage 2400W Upper Heating Element Wattage 3500W Low Grill (Broil) 2000W ACCESSORIES / OVEN CAVITY 2000W Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Rear Right 9"/12" 1800/3000W DIMENSIONS/		
Adjustable Feet Anti-tip (tilting) bracket Bottom Compartment Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Low Grill (Broil) Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Sabbath Mode Pyrolytic Self Cleaning Sabbath Mode Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Dimensions/Will (Broil) Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - height Overall dim - depth Ne weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable Use & Care Manual Forst Right Finel Type Storage Drawer St	-	
Anti-tip (tilting) bracket Bottom Compartment Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Proil Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Overall dim - width Overall dim - depth Overall dim - depth Overall dim - depth Overall Gim - depth Supply Cord & Plug Cable No INSTRUCTIONS FOR USE	_	_
Bottom Compartment Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper John Wattage Upper	*	
Fuel Type OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Pyrolytic Self Cleaning Sabbath Mode Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Front Right Rear Left Front Reight Overall dim - height Overall dim - depth Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable Use & Care Manual EN, SP, FR T50/22DOW T0"Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) STOCU Shaped Metal + Glass Cool Door - 4 Pane Heat Resistant Glass (Fixed) Storu Heat Resistant Glass (Cool Door - 4 Pane Heat Resistant Glass (Fixed) Storu Heat Resistant Glass (Cool Door - 4 Pane Heat Resistant Glass (Fixed) Storu Heat Resistant Glest Storu Heat Resistant Glest Storu Heat Resistant Glass (Fixed) Storu Heat Resistant Glest Storu Heat Resistant Storu Storu Heat Resistant Storu Storu Heat Resistant Storu Storu Heat Resistant Storu Storu Heat R		
OVEN DOOR(S) Oven Glass Window Door Cooling System Net Capacity cu. ft. Sottom Heating Element Wattage Upper Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Front Right Rear Left Front Right Rear Left Front Right Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth Note Well All (Broil) OVER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable Use & Care Manual EN, SP, FR Cool Door -4 Pane Heat Resistant Glass (Cool Door -4 Pane Heat Resistant Glass (Cool Door -4 Pane Heat Resistant Glass (Cool Door -4 Pane Heat Resistant Glass (fixed) 5.7 cu. ft. Stay in self clean - 6 levels Teauonw Towow Stay in self clean - 6 levels Tevels Stay in self clean - 6 levels Tevels No No Yes Stay in self clean - 6 levels Tevels Avouw Avitroceramic 5''/8'' 750/2200W Bridge 8'' 2200W Bridge 8'' 2200W Frant Right Front Right Fro	· ·	_
Oven Glass Window Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Broiler Pan No Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Dimensions/WeiGHT Required cutout dim (H x W x D) (in) Overall dim - height Overall dim - depth No Cable No Coby Cable Cable No Cook TOP Stay in self clean - 6 levels Tays in self clean - 6 levels At yes Stay in self clean - 6 levels At yes Stay in self clean - 6 levels A Vitroceranic Front Left S''8" 750/2200W Bridge B ''2" 1800/300W B ''2" 1800/300W B ''2" 1800/300W B ''2" 1800/300W B ''3" 750/2200W B Front B ''4" 750/220W B Front B ''4" 750/220W B Front B ''4" 750/220W B Front B ''		Electric
Door Cooling System Net Capacity cu. ft. Bottom Heating Element Wattage Upper Heating Element Wattage Low Grill (Broil) Grill (Broil) ACCESSORIES / OVEN CAVITY Rack Positions Telescopic Pull-out Shelf System Pyrolytic Self Cleaning Sabbath Mode Broiler Pan Wok adapter Chromed racks COOKTOP Zone Configuration Front Left Rear Left Front Right Rear Right Dimensions/WeiGHT Required cutout dim (H x W x D) (in) Overall dim - width Overall dim - depth Overall dim - depth No Cable Supply Cord & Plug Cable Unstructions For Use Use & Care Manual Cool Door -4 Pane Heat Resistant Glass (fixed) 5.7 cu. ft. 6.1 can colours 6.1 can call file fear of levels 7.0 call file fear of levels 7		WOWShare A Martal A Share
Net Capacity cu. ft. 5.7 cu. ft. Bottom Heating Element Wattage 2400W Upper Heating Element Wattage 3500W Low Grill (Broil) 2000W Grill (Broil) 2000W ACCESSORIES / OVEN CAVITY Accessories / Oven Cavity Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP 2 Zone Configuration 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Fear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT 36" X 30" X 25-1/2" Overall dim - width 29 13/16" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs./117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp		
Bottom Heating Element Wattage		
Upper Heating Element Wattage 3500W Low Grill (Broil) 2000W Grill (Broil) 2000W ACCESSORIES / OVEN CAVITY 2000W Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP 2 Zone Configuration 4 Vitroceramic Front Left 5"/8"750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Reight 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS		
Low Grill (Broil) 2000W Grill (Broil) 2000W ACCESSORIES / OVEN CAVITY 2000W Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP Zone Configuration Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Reight 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs./117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No USE & Care Manual EN, SP, FR	_	
Grill (Broil) 2000W ACCESSORIES / OVEN CAVITY Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP Zone Configuration Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS XW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR		
ACCESSORIES / OVEN CAVITY Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP 4 Vitroceramic Zone Configuration 5"/8"750/2200W Bridge Rear Left 8"2200W Front Right 9"/12" 1800/3000W Rear Right 6"1200W DIMENSIONS/WEIGHT 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No UISTRUCTIONS FOR USE Use & Care Manual EN, SP, FR	' '	
Rack Positions Stay in self clean - 6 levels Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP Zone Configuration 4 Vitroceramic Front Left 5"/8"750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3900W Rear Right 6"1200W DIMENSIONS/WEIGHT 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual		2000W
Telescopic Pull-out Shelf System No Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP CookToP Zone Configuration 4 Vitroceramic Front Left 5"/8"750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS XW/Amps rating at 240V, 60Hz Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual		Stavin solf cloan - E lovols
Pyrolytic Self Cleaning Yes Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP Zone Configuration 4 Vitroceramic Front Left 5"/8"750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Reight 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual		
Sabbath Mode Yes Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP 2 Zone Configuration 4 Vitroceramic Front Left 5"/8"750/2200W Bridge Rear Left 8"2200W Front Right 9"/12"1800/3000W Rear Reight 6"1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR		11.5
Broiler Pan No Wok adapter No Chromed racks 3 COOKTOP Valid of the properties of th		
Wok adapter No Chromed racks 3 COOKTOP 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual		
Chromed racks 3 COOKTOP 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS XW/Amps rating at 240V, 60Hz Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR		
COOKTOP Zone Configuration 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Rear Left 8"2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS XW/Amps rating at 240V, 60Hz KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR	1	
Zone Configuration 4 Vitroceramic Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR		
Front Left 5"/8" 750/2200W Bridge Rear Left 8" 2200W Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR		4 Vitroceramic
Rear Left 8"2200W Front Right 9"/12" 1800/3000W Rear Right 6"1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR	_	
Front Right 9"/12" 1800/3000W Rear Right 6" 1200W DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR		1
Rear Right 6"1200W DIMENSIONS/WEIGHT 36" X 30" X 25-1/2" Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR		
DIMENSIONS/WEIGHT Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb/kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR		
Required cutout dim (H x W x D) (in) 36" X 30" X 25-1/2" Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR		0 1200W
Overall dim - height 37 1/2" Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS XW/Amps rating at 240V, 60Hz Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE XV Use & Care Manual EN, SP, FR		36" X 30" X 25-1/2"
Overall dim - width 29 13/16" Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs. /117 kilograms POWER / RATINGS KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR		
Overall dim - depth 28 5/8" Net weight (lb./kg) 258 lbs./117 kilograms POWER / RATINGS 250-240V 60 Hz 40 Amp KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE Use & Care Manual Use & Care Manual EN, SP, FR	O VETAILUIIII - HEIGHL	
Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable INSTRUCTIONS FOR USE Use & Care Manual No 258 lbs. /117 kilograms 220-240V 60 Hz 40 Amp No No No No ENSTRUCTIONS FOR USE	3	
POWER / RATINGS KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR	Overall dim - width	
KW/Amps rating at 240V, 60Hz 220-240V 60 Hz 40 Amp Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR Use & Care Manual EN, SP, FR	Overall dim - width Overall dim - depth	28 5/8"
Supply Cord & Plug No Cable No INSTRUCTIONS FOR USE EN, SP, FR	Overall dim - width Overall dim - depth Net weight (lb./kg)	28 5/8"
Cable No INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS	28 5/8" 258 lbs. /117 kilograms
INSTRUCTIONS FOR USE Use & Care Manual EN, SP, FR	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz	28 5/8" 258 lbs. /117 kilograms 220-240V 60 Hz 40 Amp
Use & Care Manual EN, SP, FR	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug	28 5/8" 258 lbs. / 117 kilograms 220-240V 60 Hz 40 Amp No
	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable	28 5/8" 258 lbs. / 117 kilograms 220-240V 60 Hz 40 Amp No
	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable INSTRUCTIONS FOR USE	28 5/8" 258 lbs. /117 kilograms 220-240V 60 Hz 40 Amp No No
	Overall dim - width Overall dim - depth Net weight (lb./kg) POWER / RATINGS KW/Amps rating at 240V, 60Hz Supply Cord & Plug Cable INSTRUCTIONS FOR USE	28 5/8" 258 lbs. /117 kilograms 220-240V 60 Hz 40 Amp No No



30 INCH SLIDE-IN ELECTRIC RANGE

SLER30420SS

Outstanding Features



XL Interior Volume 5.7 cu. ft.

For the cook who enjoys some extra elbow room, Beko's oven interiors are among the most spacious in their class. With an industry-leading 5.7 cu. ft. interior volume, you'll have more than enough room for that big Thanksgiving turkey. So this year, invite the whole extended family.



InnovaChef Smart Display

Intuitive touch controls clearly display features and important cooking information.

Prime Turkey Cooking

Get perfect results with Beko's preset cooking programs, including Prime Turkey Cooking. No one has to know how easy Beko makes Thanksgiving!

Bread Proofing

For perfect bread every time, serious bakers will certainly appreciate the pre-set bread proofing option.

The convenient pre-set pizza option makes it easy for anyone to pop dinner in the oven.



Self-Clean

Even if you love to cook, you probably don't love to clean your oven. Save time and energy with Beko's self-cleaning function. Simply choose between three levels of self-cleaning, depending on how extensively your oven needs to be cleaned and the time available. Even your toughest stains will be reduced to a fine ash that's easily wiped away with a cloth, without the need for harsh detergents or chemicals.



12" XL Cooking Zone

Whoever said a watched pot never boils never cooked on a Beko range. Enjoy faster boiling and more efficient cooking in any size pot, courtesy of our extra-large cooking area.

Residual Heat Indicator

Highly visible cooktop indicators alert you when the cooking zone is too hot to safely touch.



Full Extension Storage Drawer


Enjoy easy access to the fully extending storage drawer, perfect for oven wire racks when they aren't in use.




30 INCH SLIDE-IN ELECTRIC RANGE


SLER30420SS

Dimensions and Installation

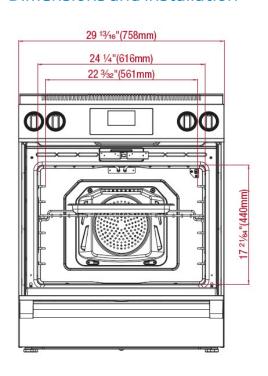


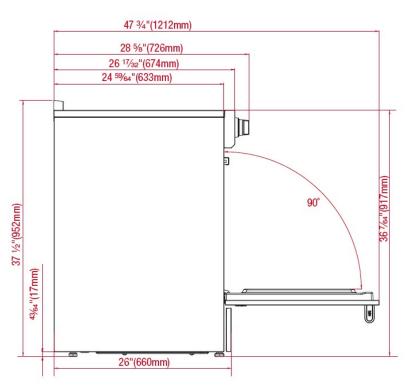

Electrical



Cabinet



NOTE TO THE INSTALLER: All height, width and depth dimensions are shown in inches (as well as metric). Beko US Inc. reserves the absolute and unrestricted right to change product materials and specifications, at any time, without notice. Please visit our website www.blombergappliances.us or call 888 352 2356 to verify the latest specifications with final dimensional data and other details prior to installation and making a cutout. Applicable product limited warranty information may be found in accompanying product materials or you may contact your account manager for further details. Proper installation is the responsibility of the installer. Product failure due to improper installation is not covered under the Limited Warranty.